
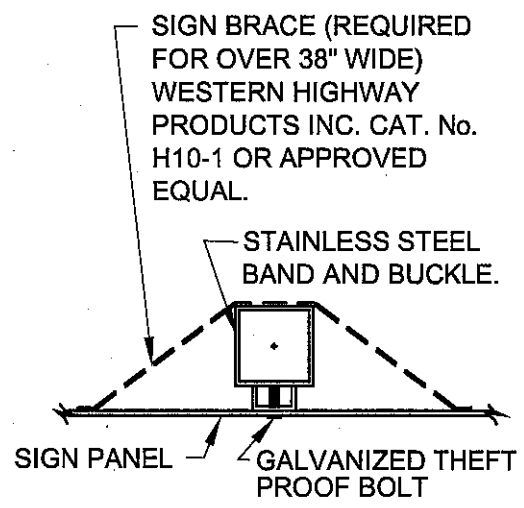


SECTION A-A
NO SCALE

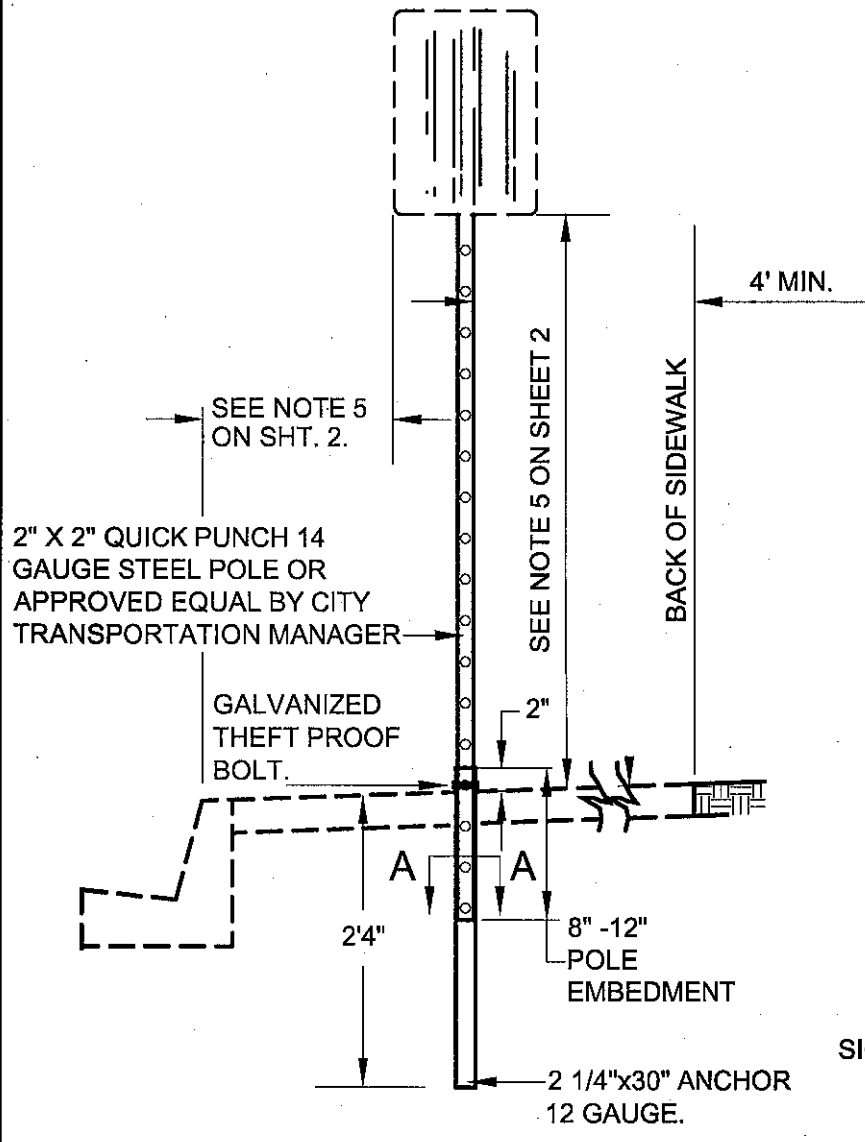

MOUNTING DETAIL
NO SCALE

NOTE: FOR NON-SIDEWALK OR OTHER PAVED AREA USE SOLID ANCHOR (NON-PERFORATED)

CITY OF SAN BUENAVENTURA

PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION

STREET SIGN

STD. DET. NO.
119

APPROVED BY: 
CITY TRANSPORTATION MANAGER

APPROVED BY: 
CITY ENGINEER R.C.E. 80986

DATE **9/28/2017**

SHEET
1 of 2

STREET SIGN NOTES

1. GALVANIZED PARTS SHALL BE HOT-DIP GALVANIZED PER SECTION 210-3 OF THE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION.
2. STAINLESS STEEL STRAPPING BAND SHALL BE 3/4" WIDE AND .020 THICK.
3. SIGNS SHALL BE INSTALLED ON ELECTROLIERS OR LIGHTING FIXTURES WHEREVER PRACTICABLE.
4. SIGNS SHALL BE A OF MINIMUM 4 FEET AWAY FROM FIRE HYDRANTS AND OTHER UTILITIES AND NOT RESTRICT PEDESTRIAN TRAFFIC.
5. SIGN MOUNTING HEIGHT AND SETBACK FROM FACE OF CURB PER CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (CMUTCD). FOR A 5' SIDEWALK ADJACENT TO BACK OF CURB, INSTALL SIGNS AT BACK OF SIDEWALK.
6. JACKHAMMER HOLES IN THE SIDEWALK ARE NOT PERMITTED FOR INSTALLATION OF STREET SIGNS. A CORED HOLE IN THE SIDEWALK IS REQUIRED. THE SIZE OF THE HOLE IS DETERMINED BY THE SIZE OF THE POLE REQUIRED.
7. ALL SIGN PANELS SHALL BE .080" THICK SHEET ALUMINUM 6061-T6 GRADE.
8. ALL SIGN PANELS SHALL BE REFLECTORIZED PER CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (CMUTCD), CURRENT EDITION, AND HAVE 3M 1160 GRAFFITI RESISTANT COATING OR EQUIVALENT.

CITY OF SAN BUENAVENTURA

PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION

STREET SIGN

STD. DET. NO.

119

APPROVED BY: 
CITY TRANSPORTATION MANAGER

APPROVED BY: 
CITY ENGINEER R.C.E. 80986

DATE 9/28/2017

SHEET
2 of 2